


NOTES:


1. SUBSTRATE: POLYMER FILM XP42HE-40
2. OPERATING TEMPERATURE: -40 to +80 °C
3. WAVELENGTH RANGE: 400 - 700nm
4. EXTINCTION RATIO: 30,000:1
5. POLARIZATION EFFICIENCY (%): > 99.99
6. TRANSMISSION (%):  
 SINGLE:  $42.6 \pm 2$   
 PARALLEL: 36.4  
 CROSSED: <0.001
7. ROHS COMPLIANT

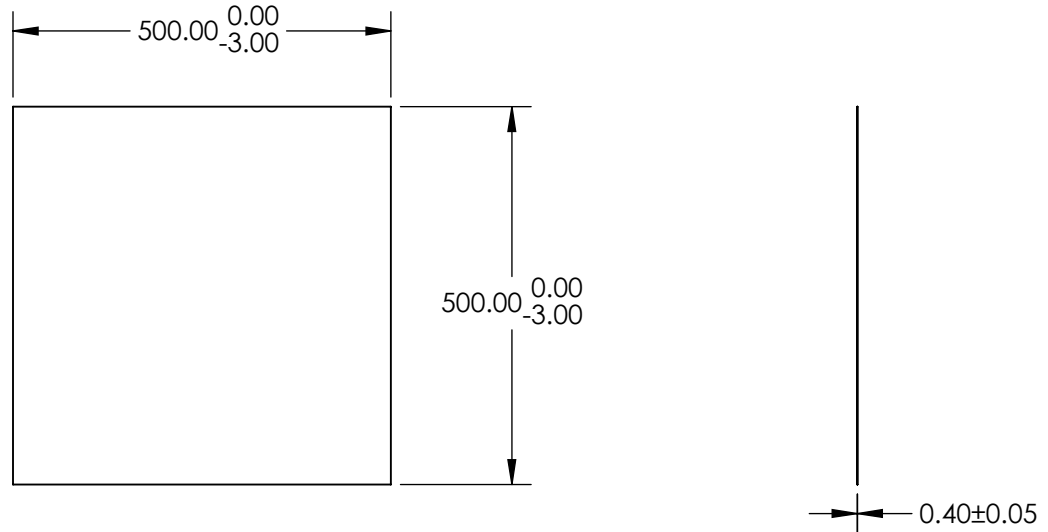

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
 DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® **Edmund Optics**®

**FOR INFORMATION ONLY:  
 DO NOT MANUFACTURE  
 PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION 		TITLE	500 x 500mm LINEAR POLARIZING FILM (XP42HE-40)	
ALL DIMS IN	mm	DWG NO	14346	SHEET 1 OF 1